




HARDWARE

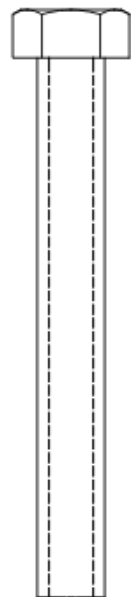


3/8" x 3"
Machine Bolt




5/16" x 1"
Machine Bolt



5/16" Washer




3/8" Washer



3/8" Hex Nut


TOOLS REQUIRED

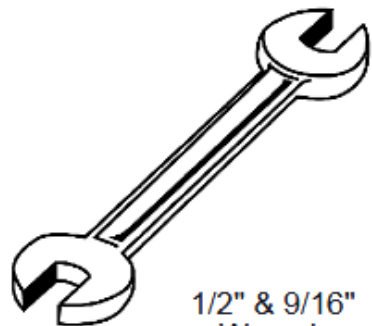


1/2" & 9/16"
Wrench



1/2" & 9/16"
Socket Wrench



Tape Measure

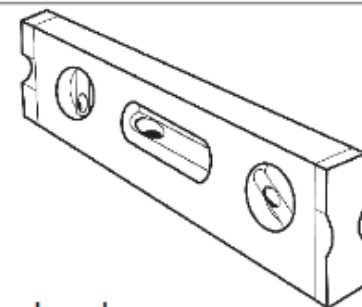

Level

BARK PARK PRODUCT SPECIFICATIONS

BARK-450 ROVER JUMP OVER


Frame: Laser cut 10 ga. sheet steel. Posts are 2" sq. tubing. Jump rod is made from 1" x 15 ga. steel tubing.

Frame Coating: Electrostatic powder coated application oven cured.

Dimensions: 78" long x 43" deep x 30 3/8" tall. Jump rod can be placed at heights of 9 1/4", 14 3/8" or 19 1/2".


Panel Coating: Oven fused functionalized polyethylene copolymer-based thermoplastic. Fluidized bed coating application with superior mechanical performance, impact resistance and UV-stability.

COMPONENTS

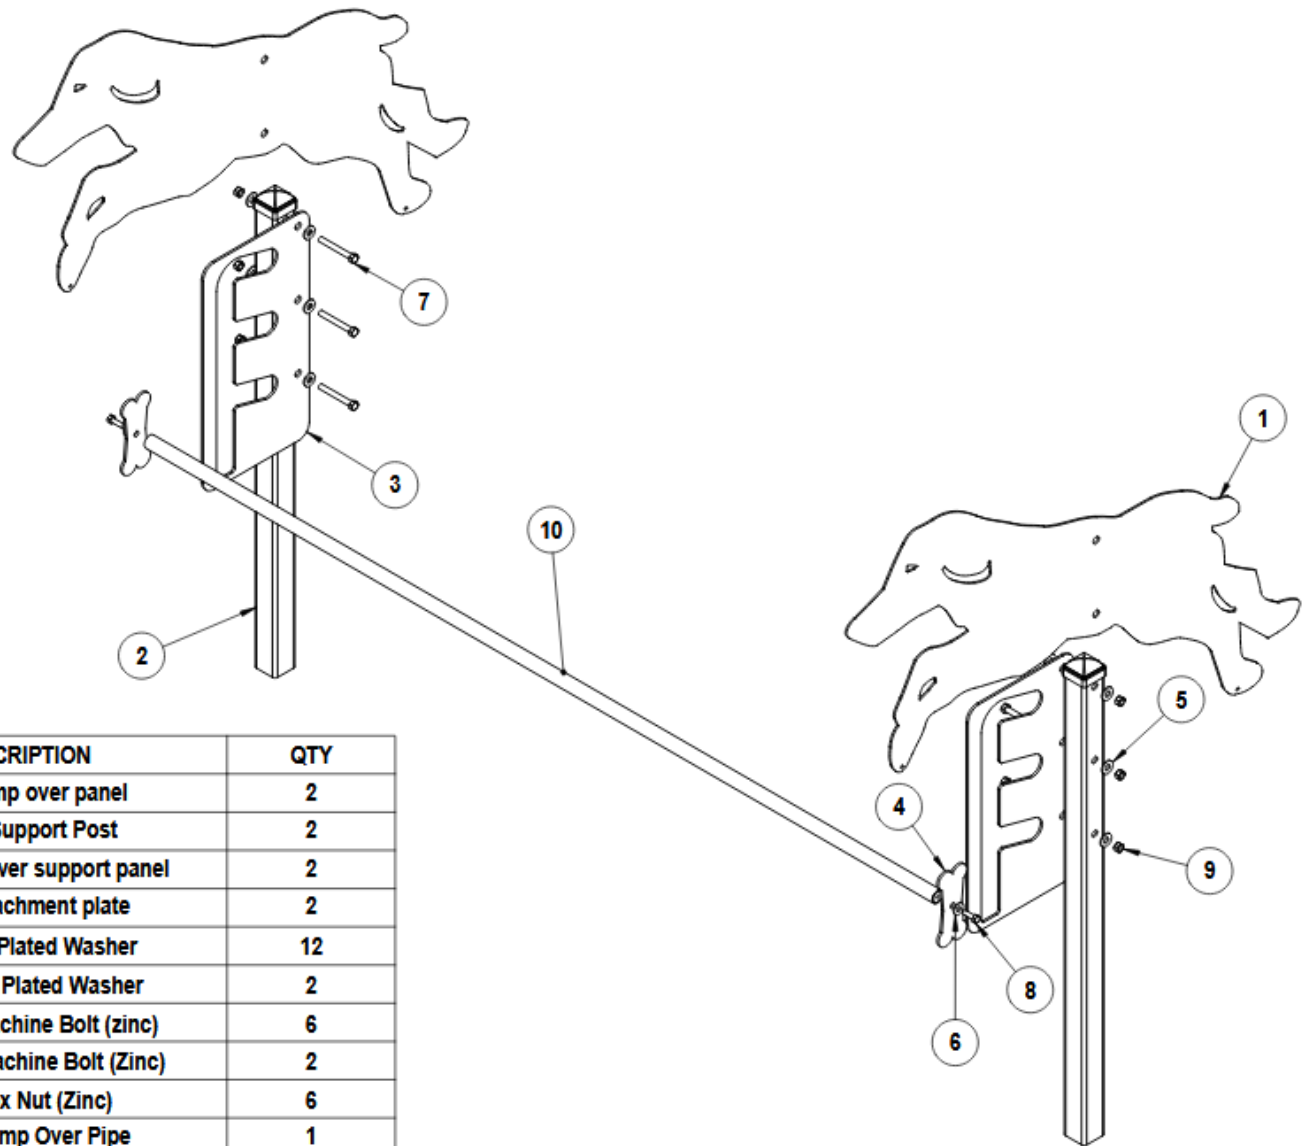


ITEM NO.	PartNo	DESCRIPTION	QTY
1	T-01-08-0006	rover jump over panel	2
2	P-01-08-0033	Rover Support Post	2
3	T-01-08-0007	rover jump over support panel	2
4	P-01-08-0008	bone attachment plate	2
5	33-02-0002	3/8" Zinc Plated Washer	12
6	33-02-0001	5/16" Zinc Plated Washer	2
7	33-05-0008	3/8" x 3" Machine Bolt (zinc)	6
8	33-05-0001	5/16" x 1" Machine Bolt (Zinc)	2
9	33-01-0002	3/8" Hex Nut (Zinc)	6
10	P-01-08-0034	Rover Jump Over Pipe	1

STEP 1

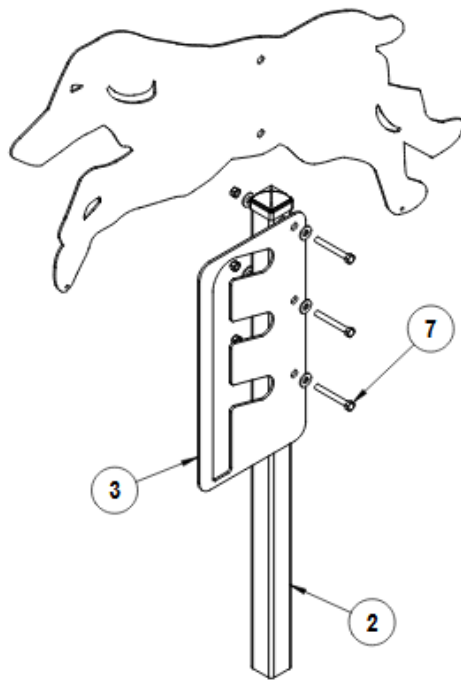


Attach Rover Jump Over Panel and Rover Jump Over Support Panel to Rover Support Post using specified hardware.

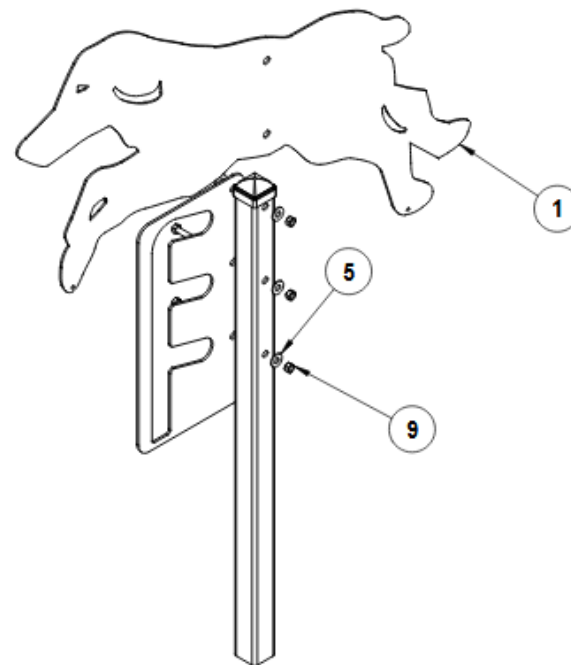


STEP 2

Pull Jump Pipe through corresponding slots in the Rover Jump Over Support Panel, then attach Bone Attachment Plates to both ends of the Jump Pipe using specified hardware. Use Loctite on these bolts.

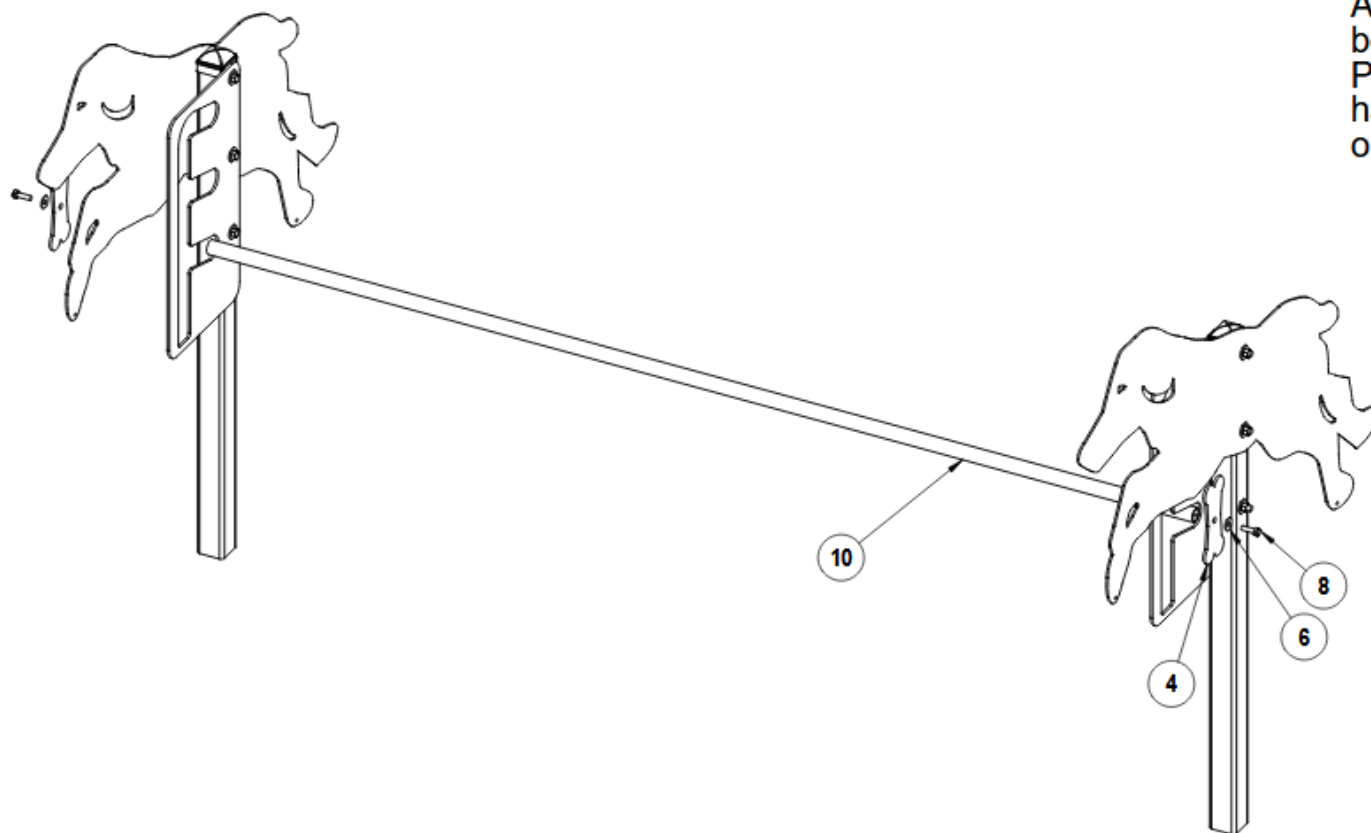

FOOTINGS

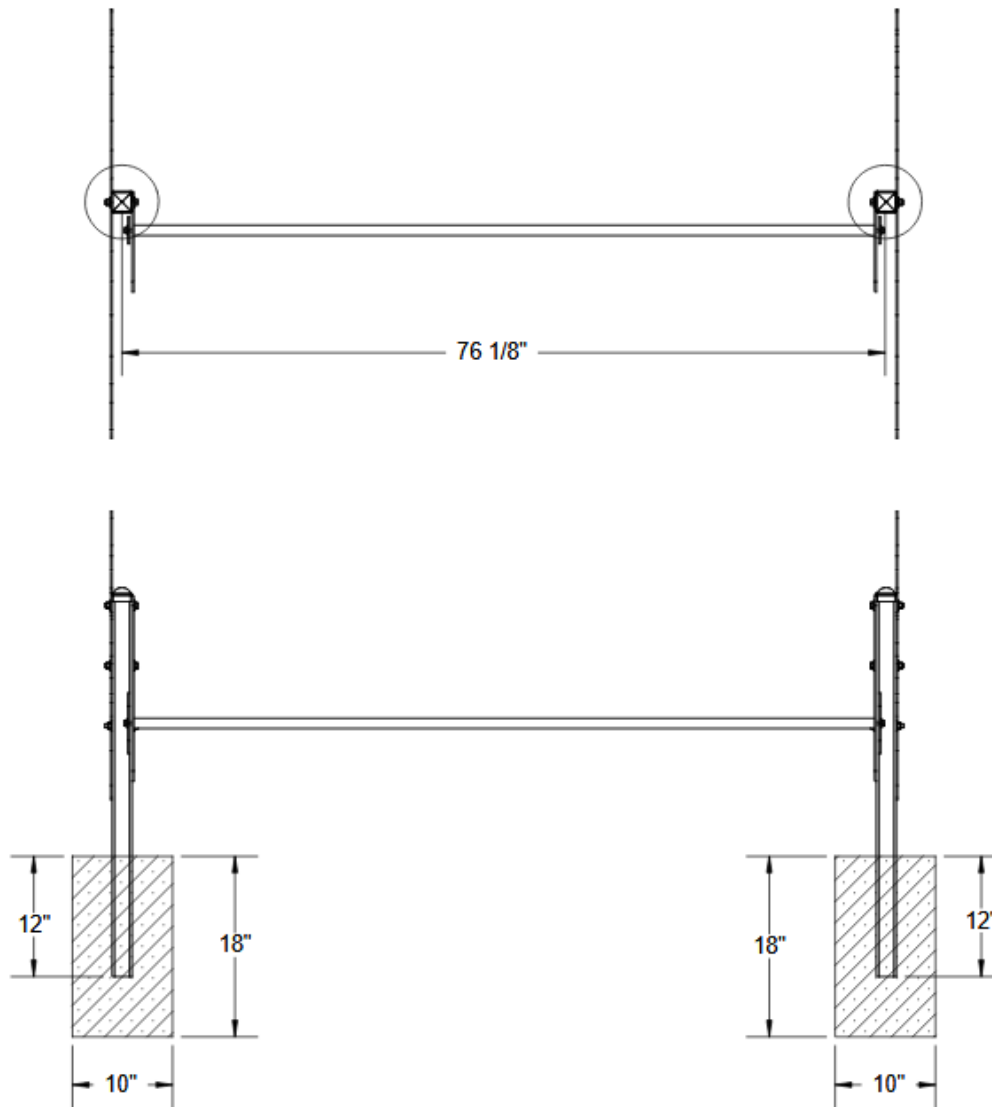

OVERALL DIMENTIONS

