

Picnic Table For Fastener Pack (FP-OHT-CU-02)

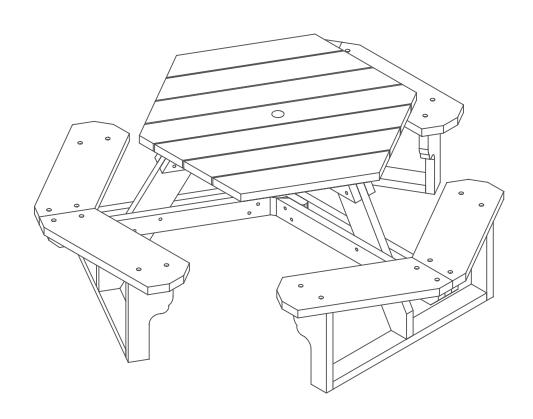

Congratulations!!

You have just purchased the finest recycled plastic picnic table available. Enjoy!!!

Before assembly, please make sure all components are included.




F - Small Spoke Assembly

(1) - One Table Top w/ Small Spoke Assembly OTSA-OHT-A-02




(1) - One Fastener Pack FP-OHT-CU-02

FP - Fastener Pack

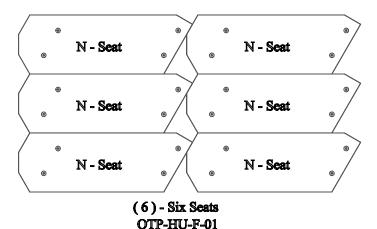

, H-Leg , , H-Leg ,


(3) - Three Legs OTP-HRA-G-01




(3) - Three Large Spokes OTSA-HRA-A-02

A - Leg Support
A - Leg Support
A - Leg Support

(3) - Three Leg Supports OTP-HRA-A-01



(1) - One Center Propeller PS-OTC-A-01



(6) - Six Seat Supports OTP-HRA-H-01 Before assembly, please make sure all fasteners are included.

18 - 3/8" x 5" Hex Head Bolt


36 - 3/8" Flat Washer

18 - 3/8" Nylon Lock Nut

30 - #12 x 3" Flat Head Phillips Screw




12 - #12 x 2 1/2" Flat Head Phillips Screw




Also needed for this assembly will be the following materials:

- 1 #3 Phillips Drive Bit
- 2 9/16" Socket Wrench

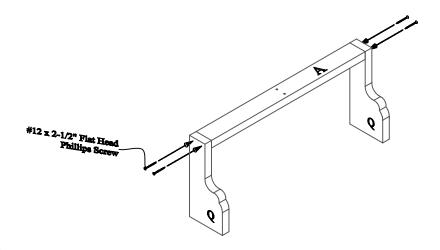


Step #1:

Fasten (2) Two seat supports onto each end of (1) One leg support. Be sure that each seat support when fastened are pointing in the same direction as shown above. Use (1) One # $12 \times 2 \frac{1}{2}$ " Flat Head Phillips Screw per hole to secure.



Step #2:


Fasten the seat support assembly to the leg as shown above. Use (1) One #12 x 3" Flat Head Phillips Screw per hole to secure.



Step #3:

Slide the large spoke assembly up to match the holes to the legs. Secure the large spoke assembly to the legs as shown above. Use (1) One 3/8" x 5" Hex Head Bolt and (1) One 3/8" Flat Washer along with (1) One 3/8" Flat Washer and (1) One 3/8" Nylon Lock Nut per hole to secure.

Do not tighten bolts completely. This will be done in a later step.




Step #4:

Fasten the seats to the large spoke assembly using the provided pilot holes and seat support assemblies as shown above. Be sure when installing the set of seats that the inner edges are flush and tight with each other. Use (1) One #12 x 3" Flat Head Phillips Screw per hole to secure.

Step #5:


Repeat steps 1 thru 4, two times.

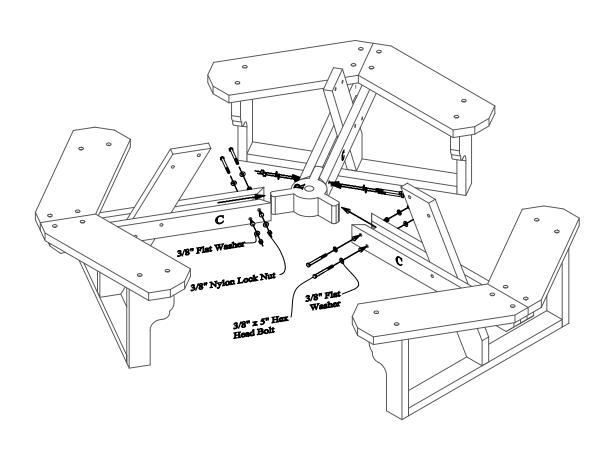

Step #6:

Assemble the leg/seat assemblies to the center propeller as shown above. Use (1) One 3/8" x 5" Hex Head Bolt and (1) One 3/8" Flat Washer along with (1) One 3/8" Flat Washer and (1) One 3/8" Nylon Lock Nut per hole to secure.

Do not tighten bolts completely. This will be done in a later step.

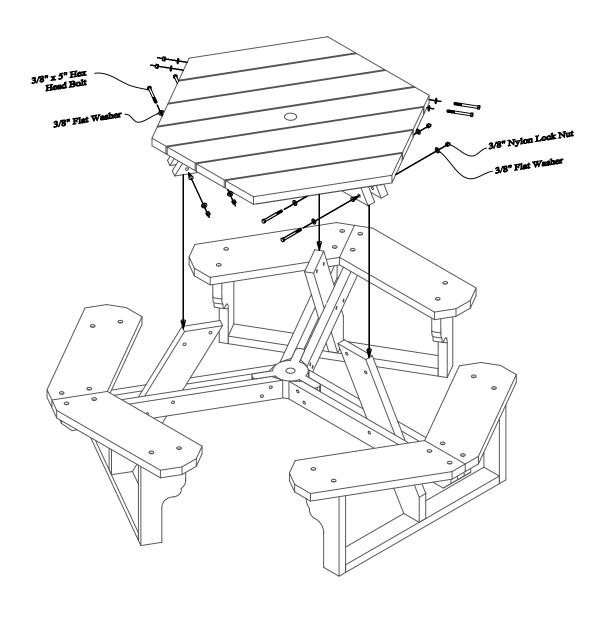

Step #7:

Place the table top assembly onto the leg/seat assembles as shown above. Slide (1) One leg between the propellers of each spoke assembly. Secure the legs to the small spoke assembly. Use (1) One 3/8" x 5" Hex Head Bolt and (1) One 3/8" Flat Washer along with (1) One 3/8" Flat Washer and (1) One 3/8" Nylon Lock Nut per hole to secure.

Be sure to tighten all loose bolts after completing this step.

IDIEAIR VAILUIEID CUSTOMIEIR,

THIANK YOU FOR PURCHASING THIS
PRODUCT. THIS PRODUCT IS
MIANUFACTURED USING RECYCLED
MIATERIALS AND MIAY HIAVE SLIGHT
COLOR VARIATIONS, OCCASIONAL
SPECKS OF COLOR OR HRREGULAR
SURFACE PATTERNS. THIESE ARE
NORMAL CONDITIONS OF RECYCLED
PLASTICS AND MAKE EACH PIECE OF
FURNITURE UNIQUE. THESE
CHARACTERISTICS DO NOT AFFECT
THE STRENGTH, QUALITY OR
PERFORMANCE OF THE PRODUCT.

THANK YOU AGAIN FOR PURCHASING
THIS PRODUCT AND HIELPING OUR
JENVIIRONMIENT.